



Medical



Industrial

FEATURES AND BENEFITS

Output Power of up to 660W with airflow, only derating to 450W convection cooled across entire input range.

Safety: IEC/UL/EN62368-1, IEC/UL/EN60601-1, 3rd Edition +Am1

4" W x 6" L x 1.55" H Size

Meets Heavy Industrial/IEC60601-1-2 4th Edition EMC Requirements

Universal 85-264Vac Input Range

Less than 100uA Leakage Current

Meets Class B RE and CE Emissions levels

Class I and Class II Input versions available

7+ Years Electrolytic Capacitor Life

3-year warranty



MODEL SELECTION

Model Number	Nominal Output Voltage	Output Current (w/air)	Output Power (w/air) ¹	Output Current (convection)	Output Power Convection	Output Current (conduction)	Output Power (conduction)	Standby Output	Fan Output
NGB660S12K	12V	46.2A	560W	30.6A	370W	38.9A	470W	5Vdc @ 1A	Custom modifications available upon request
NGB660S15K	15V	37.0A	560W	24.5A	370W	31.1A	470W		
NGB660S24K	24V	27.2A	660W	18.2A	440W	21.5A	520W		
NGB660S48K	48V	13.6A	660W	9.1A	440W	10.7A	520W		
NGB660S12C	12V	46.2A	560W	30.6A	370W	38.9A	470W	5Vdc @ 1A	
NGB660S15C	15V	37.0A	560W	24.5A	370W	31.1A	470W		
NGB660S24C	24V	27.2A	660W	18.2A	440W	21.5A	520W		
NGB660S48C	48V	13.6A	660W	9.1A	440W	10.7A	520W		
NGB660SxxZyy ³	±10%	custom	custom	custom	custom	custom	custom	custom	custom

- Notes:
- Includes 5V standby power (5W w/air, 2.5W convection)
 - Unless otherwise noted, all parameters are specified at nominal input (115/230Vac), 50°C ambient operating temperature.
 - Contact local representative for modifications requests
 - Suffix "K" denotes Class I input and suffix "C" denotes Class II input
 - 300 LFM for airflow and 6.89" W x 9.84" L x 0.13" H (175mm x 250mm x 3.2mm) plate for conduction cooling ratings

SAFETY

Certification	Description	Notes
UL	UL62368-1 / UL60601-1, 3rd Edition, Am1	Complies with BF rated application requirements
CSA	CAN/CSA-C22.2 No. 62368-1; 60601-1, Am1	Complies with BF rated application requirements
Demko	EN62368-1; EN60601-1, 3rd Edition, Am1	Complies with BF rated application requirements
CB Report	IEC62368-1, IEC60601-1, Am1	Designed to meet 5000m and 50°C, 93% RH with 120 h (Tropical standard) according to GB4943 1-2011
Custom certifications available upon request		
Contact SLPE for additional certification and regional approvals requirements		

ISOLATION

Parameter	Insulation Safety Rating	Electric Strength Test Voltage (HIPOT)	Notes
Insulation Safety Rating	Input-Ground: 2000VAC, 1 MOPP	Input-Ground: 2000VAC	Input/Output-Ground: Class I only
	Input-Output: 4750VAC, 2 MOPP	Input-Output: 4750VAC	
	Output-Ground: 2000VAC, 1 MOPP	Output-Ground: 2000VAC	



INPUT

Parameter	Conditions/Description	Min	Nom	Max	Units	Modification Range
Input Voltage	Single phase, safety approved (tested also at 80Vac)	90	115/230	264	Vac	Contact SLPE
Input Current	7.0A max at 115VAC, 3.5A at 230VAC	3.5		7.0	A	
Input Fuses	250VAC fuse in both line and neutral		6.3A			Contact SLPE
Turn-On Input Voltage	Ramping up		80		Vac	Contact SLPE
Turn-Off Input Voltage	Ramping down		75		Vac	Contact SLPE
Input Frequency		47	50/60	63	Hz	400Hz
Inrush Current Limitation	264VAC, cold start			40	A	Active limit circuit
Power Factor			0.98			See performance data
No Load Input Power				0.5	Watt	

OUTPUT

Parameter	Conditions/Description	Value	Modification Range
Output Power	See model selection list		Contact SLPE for other output and load condition requirements.
Hold up time	Typical, measured at 100VAC/60Hz performance data available upon request	25ms	
Hold up time 5V stby	Typical, measured at 100VAC/60Hz performance data available upon request	1.0s	
Peak Rating	For duty cycle <10%, ambient temperature <40°C, duration <1ms	130%	
Ripple and Noise	%Vout on all models (peak to peak) ²	1%	
Load Regulation	%Vout on all models	±2%	
Line Regulation	%Vout on all models	±1%	
Total Regulation	%Vout on all models	±5%	
Minimum Load	Not required		
Initial Set Point Tolerance	%Vout on all models	±1 %	
Output Adjustability	%Vout on all models	±5%	
Overshoot	under all conditions	<5% at turn-on <1% at turn-off	
Monotonic Wave form	main output at start up, shut down and fault (OVP, OCP, OTP, OPP, SCP) triggered shutdown		
Transient Response	500µs response time for return to within 0.5% of final value for any 50% load step over the range of 25% to 100% of rated load, $\Delta i/\Delta t < 0.2A/\mu s$. Max. voltage deviation is ±3.5% of final value		
Capacitive Load	Nominal tested capacitance, values vary with respect to output voltage. contact SLPE for detailed requests	1000µF	

Notes:

1. Unless otherwise noted, all parameters are specified at nominal input (115VAC/230VAC), 25°C ambient operating temperature, no load to full rated output power, and nominal output voltage.
2. See "FEATURES" section for measurement method description.

PROTECTION

Parameter	Conditions/Description	Mode	Modification Range
Overvoltage Protection	115% to 155% of nominal output voltage	Hiccup Mode	Contact SLPE
Short Circuit Protection	Short across the output terminals will not cause damage to the unit	Latch-off Mode ¹	Contact SLPE
Thermal Protection	Will shut down upon an overtemperature condition	auto-recovery	Contact SLPE
Overload Protection	130%–180% of rated output current value	Hiccup Mode	Contact SLPE

Notes:

1. Turn off/on with inhibit or reset of AC input voltage will restart the power supply.



RELIABILITY

Parameter	Conditions/Description
MTBF	>500K hours
Warranty	3 Years
REACH	Product is REACH compliant
ROHS	Product is ROHS compliant
Electrolytic Capacitor Lifetime	All specified electrolytic capacitors exceed 10-year life based on operating at 25°C ambient temp., 24 hrs/day, 365 days/year, 6 power up cycles/day.

ENVIRONMENT

Parameter	Conditions/Description
Operating Temperature Range	-20°C to +80°C
Power Derating over temperature	Derate output power above 50°C - see derating table for details
Relative Humidity	5% to 95%, non-condensing
Altitude	Operating: -500m to 5,000m Non-operating: -500m to 12,192m
Storage Temperature	-40°C to +85°C
Vibration	Random Vibration: Operating: 0.003g/Hz, 1.5gr overall, 3 axes, 10 min/axis, 5Hz-500Hz. Non-Operating: random waveform, 3 minutes/axis, 3 axes and Sine waveform, Vib. frequency/ acceleration: 10Hz-500Hz/1g, sweep rate of 1 octave/minute, Vibration time of 10 sweeps/axes, 3 axes Transportation Vibration: Random vibration per MIL-STD-810, Method 514.4, Cat. 1, Figure 514.4-1, 1hr in each of three axes
Shock (IEC 60068-2-27)	Operating: Half-sine, 20gpk, 10ms, 3 axes, 6 shocks total. Non-Operating: Half-sine waveform, impact acceleration of 50G, Pulse duration of 6ms, Number of shocks: 3 for each of the three axes
Cooling	400LFM of airflow, Natural Convection, or conduction. See chart for applicable output ratings.
Audible Noise	<20dBA

Custom requirements or modifications

Contact SLPE for custom requirements or modifications requests

LEAKAGE CURRENT

Parameter	Maximum value @264Vac, 60Hz Normal Condition (NC) Single Fault Condition (SFC)	Modification Range
Input to Earth	NC: 290µA SFC: 540µA	Lower leakage current values achievable, contact SLPE for modification requests
Input to Output	NC: Class I - 65µA Class II - 60µA SFC: Class I - 190µA Class II - 110µA	
Output to Earth	NC: Class I - 200µA Class II - 140µA	

EMI/EMC COMPLIANCE


Parameter	Conditions/Description	MR ¹
Conducted Emissions	EN55011/15/32: Class B, CISPR11/15/32: Class B, FCC Part 15.107, Class B, Measured at 10%, 50%, and 100% load steps; 6dB margin typical, at 120VAC and 230VAC	Contact SLPE for other deviant EMI/EMC requirements
Radiated Emissions	EN55011/15/32: Class B, CISPR11/15/32: Class B, FCC Part 15.107, Class B, Measured at 10%, 50%, and 100% load steps; 3dB margin typical, at 120VAC and 230VAC	
Harmonic Current Emissions	EN61000-3-2, Class A at 230VAC, 100% load	
Voltage Fluctuations & Flicker	IEC61000-3-3	
Electrostatic Discharge Immunity (ESD)	EN55024/IEC61000-4-2, Level 4: ±8kV contact, ±15kV air, Criteria A IEC60601-1-2, 4 th Edition, Table 4	
Radiated RF EM Fields Susceptibility	EN55022/EN61000-4-3, 10V/m, 80MHz- 2.7GHz, 80% AM at 1kHz IEC60601-1-2, 4 th Edition, Table 4	
Electrical Fast Transients / Bursts	EN55024/IEC61000-4-4, Level 4, ±4kV, 100kHz rep rate, 40A, Criteria A IEC60601-1-2, 4 th Edition, Table 5	
Surges Line to Line (DM) and Line to Ground (CM)	EN55024/IEC61000-4-5, Level 4, ±2kV DM, ±4kV CM, Criteria A; Surpasses IEC60601-1-2, 4 th Edition requirements	
Conducted Disturbances induced by RF Fields	EN55022/IEC61000-4-6, 3V/m – Level 4, 0.15 to 80MHz; and 12V/m in ISM and amateur radio bands between 0.15MHz and 80MHz, 80% AM at 1kHz IEC60601-1-2, 4 th edition, Table 5	
Rated Power Frequency Magnetic Fields Test	EN55024/IEC1000-4-8, Level 4: 30A/m, 50Hz/60Hz IEC60601-1-2, 4 th Edition, Table 4	
Voltage Dips	EN55024/IEC/EN61000-4-11: --100% dip for 10 ms, at 0°, 45°, 90°, 135°, 180°, 225°, 270° and 315°: --100% dip for 20ms, 0°, Criteria B (Criteria A at 70% output) --100% dip for 500ms (250/300 cycles), Criteria B -- 60% dip for 100ms, Criteria B -- 30% dip for 500ms, Criteria B IEC60601-1-2, 4 th Edition, Table 5	
Common Mode Noise: High Freq. (100KHz-20MHz)	500mA pk-pk	

Notes:

1. MR – Modification Range




BLOCK DIAGRAM

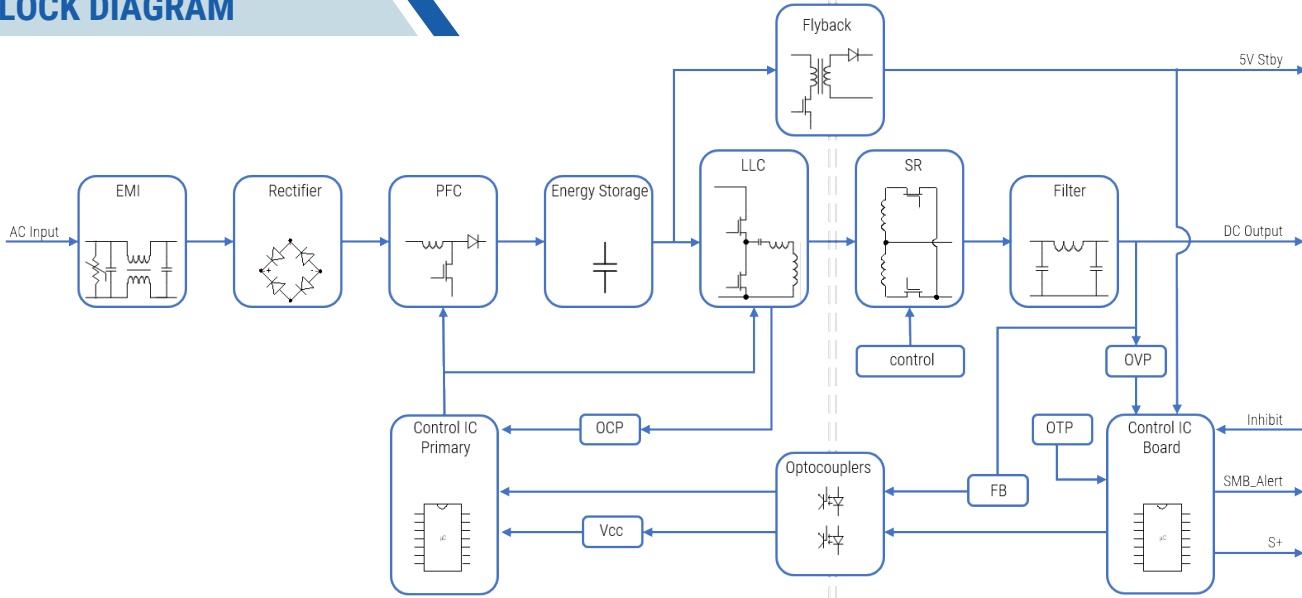

TIMING DIAGRAM

Parameter	Min	Typical	Max	Unit
Turn-On Time – Main output	500		1000	mSec
Turn-On Time – 5Vsb output			100	mSec
Rise Time, 10% Vmain to Vmain in regulation			100	mSec
Hold up time - All outputs stay within regulation after loss of AC @ 80% Load	20			mSec
Hold up time - Vsb - stays within regulation after loss of AC	100			mSec
Turn-On Time at -20°C		300		mSec

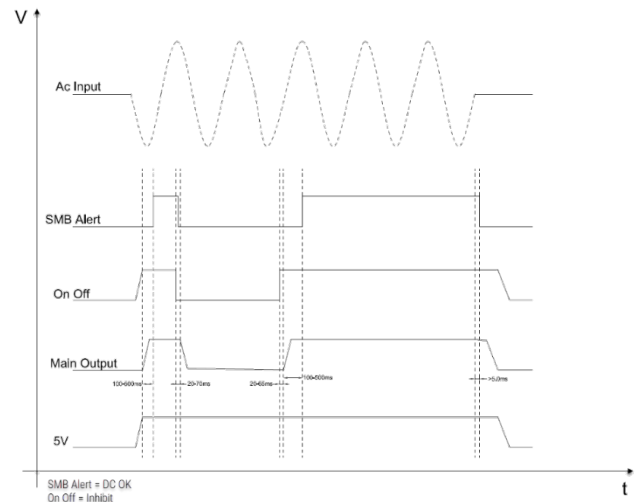

UNIT PACKAGING

Inserted Instructions	Instruction Sheet to be provided with all units packaged in individual unit box when used
Individual Unit Packing	Units can be packed in egg crate type cartons for production quantities. Individual product shipments should include an individual unit box
Master Carton Shipping Box	16 units per master carton. Unit packaged into carton must be protected such that it will sustain 1.4m drop test onto hard surface. Only anti-static packing material may be used inside the box. Exterior box sealing tape shall be anti-static type. Box size: 46.8x37.6x13.6cm, Box weight: 14.2kg.
Individual Carton Packing Box (when used)	Individual carton must be labeled with ROHS sticker and individual label showing unit serial number, bar code, manufacturing date, bar code, and Manufacturing part number, bar code, country of origin.

ACCESSORIES

Type	Conditions/Description	Part Number
Cover	IP20 protection cover for self-assembly.	Contact SLPE
Power supply with cover assembled	Power supply with IP20 protection cover assembled.	Contact SLPE
Cover with fan	IP20 protection cover with additional fan for self-assembly.	Contact SLPE
Power supply with cover and fan assembled	Power supply with IP20 protection cover and additional fan, assembled.	Contact SLPE
Conformal coating	conformal coating of the power supply or potting	Contact SLPE
Custom changes	Any customized requests are subject to feasibility review by SLPE team	Contact SLPE



CONNECTORS


Type	Connector Part Number	Pinout	Function	Mating Connector Part Number: ¹
Input (Class I)	DT-35-B07W-03	J100-1	AC Line	MOLEX# 19141-0052/0053
		J100-2	AC Neutral	
		J100-3	Ground	
Input (Class II)	DT-35-B07W-03	J100-1	AC Line	MOLEX# 19141-0052/0053
		J100-2	AC Neutral	
		J100-3	NC	
Output	AO-12/4J-N11-T	J103 (1)	Vout+	MOLEX# 19141-0058/0059/0063-66
		J104 (2)	DC Return	
Auxiliary Signals	Landwin# 2052P14S9T	J400-1	RTN	JST# PHDR-14VS Or Landwin# 2050S1400 Pins: 2053T021N
		J400-2	NC	
		J400-3	S+	
		J400-4	RTN	
		J400-5	NC	
		J400-6	SMB_Alert	
		J400-7	NC	
		J400-8	INHIBIT	
		J400-9	NC	
		J400-10	NC	
		J400-11	RTN	
		J400-12	NC	
		J400-13	+5V	
		J400-14	+5V	

Note:

1. Contact SLPE representative for other compatible connector options.



SIGNALS DESCRIPTION

Function	Description
RTN	Return paths for all auxiliary connections. Not isolated from DC output return
NC	not connected no function.
S+	positive remote sense; use RTN for S- path; Typical voltage compensation 200 mV
SMB_Alert	DC OK signal
INHIBIT	on = open or logic HIGH (>3.4V - 5V); off = RTN or logic LOW (<0.8V)
+5V	Standby voltage 5V DC, 1A max. always present.

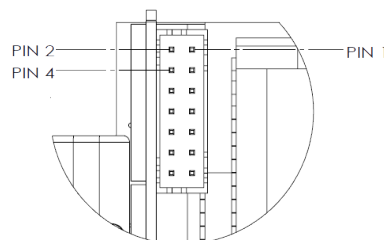

J400 Pin map

DERATING

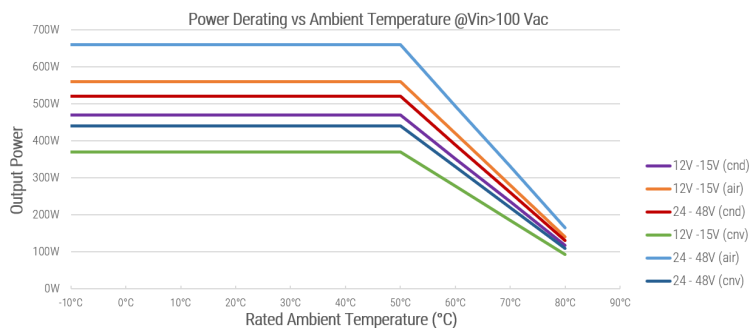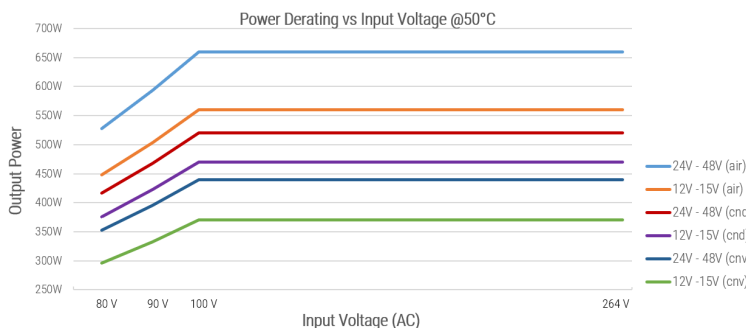

Note:

1. Airflow cooling ratings measured at 300 LFM airflow





2. Conduction cooling ratings measured with 6.89" W x 9.84" L x 0.13" H (175mm x 250mm x 3.2mm) plate.

Vin @50°C	12V-15V (air)	12V-15V (cond.)	12V-15V (conv.)	24V-48V (air)	24V-48V (cond.)	24V-48V (conv.)
80Vac	448W	376W	296W	528W	416W	352W
90Vac	504W	423W	333W	594W	468W	396W
100Vac	560W	470W	370W	660W	520W	440W

Amb. temp. Vin>100Vac	12V-15V (air)	12V-15V (cond.)	12V-15V (conv.)	24V-48V (air)	24V-48V (cond.)	24V-48V (conv.)
-10°C - 50°C	560W	470W	370W	660W	520W	440W
60°C	420W	352.5W	277.5W	495W	390W	330W
70°C	280W	235W	185W	330W	260W	220W
80°C	140W	118W	93W	165W	130W	110W



OUTLINE DRAWING

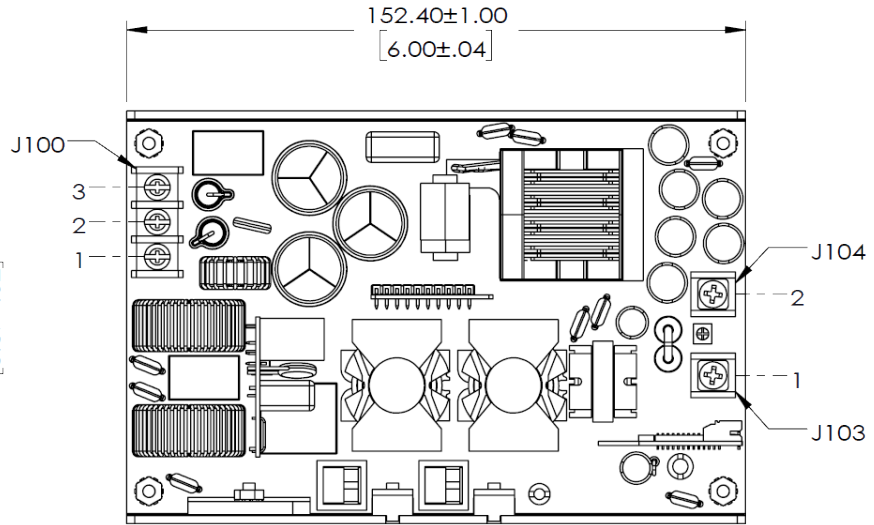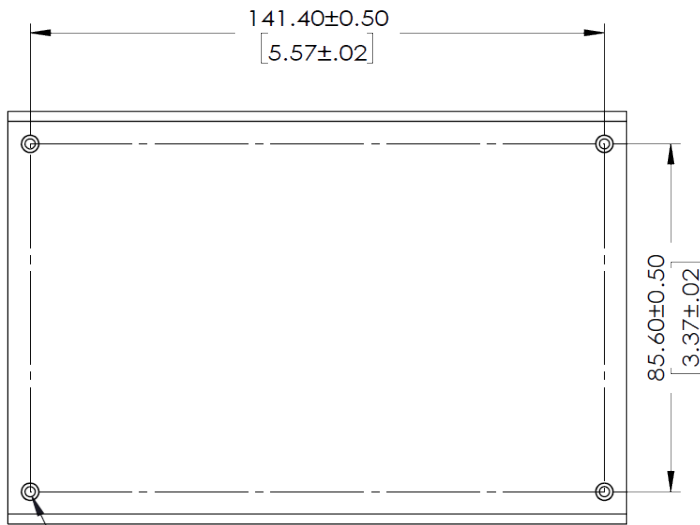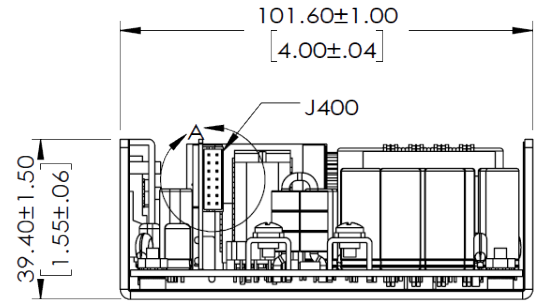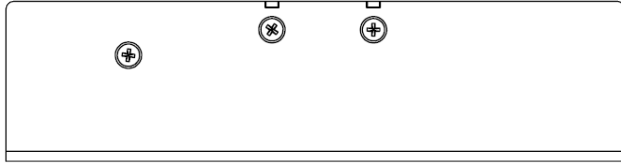

Screw (M3x0.5) penetration
3.5mm Max.

Recommended
airflow direction

SIZE


Dimensions	W: 4" x L: 6" x H: 1.55" (W: 101.6mm x L: 152.4mm x H: 39.4mm)
Unit Weight	830g
Modification Range	Mounting hole locations, form factor, other specific requirements



PERFORMANCE DATA


Note: performance data results for NGB660S24K, Class I with 24 V output at 25°C.
Data for other voltages, Class II and other temperatures available upon request.

Turn-on Delay Time Test @115Vac/60Hz - Main output

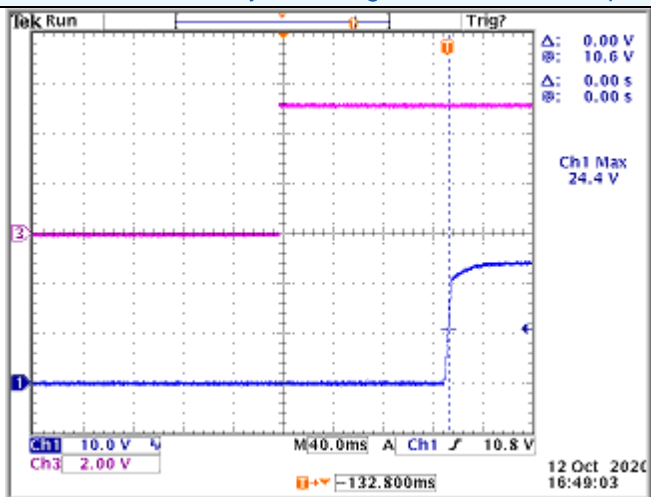


*Ch3 Signal triggered on on/off of AC source

Hold-up Time Test @100Vac/60Hz - Main output

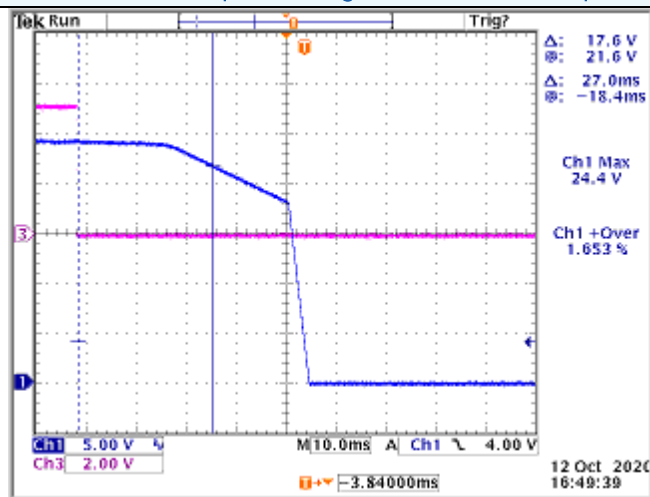


*Ch3 Signal triggered on on/off of AC source

Turn-on Delay Time Test @115Vac/60Hz - Standby 5V output

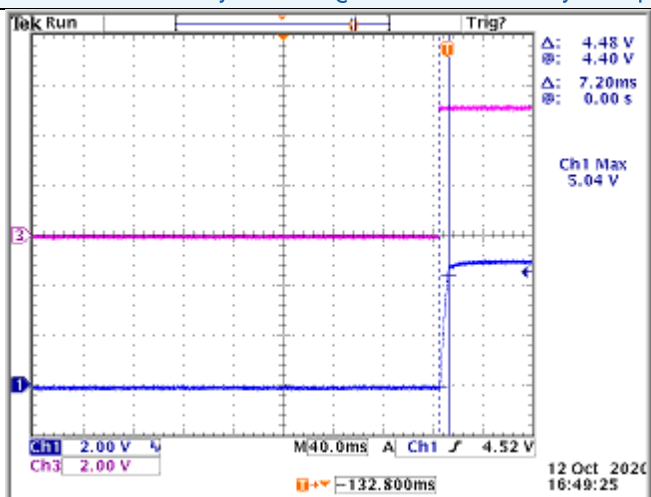

*Ch3 Signal triggered on on/off of AC source

Hold-up Time Test @100Vac/60Hz - Standby 5V output

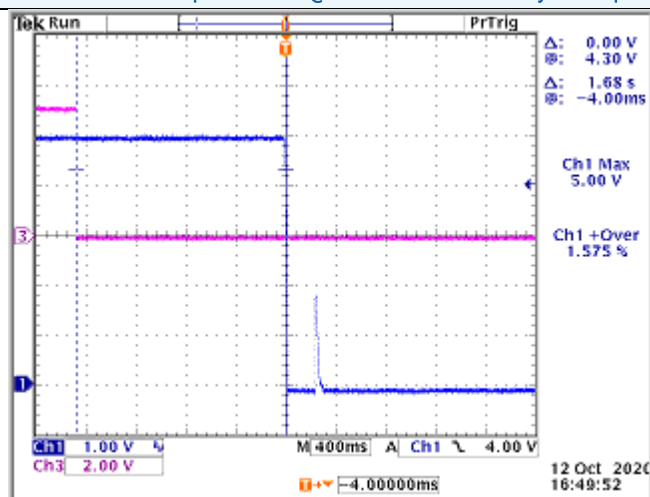


*Ch3 Signal triggered on on/off of AC source

Power Factor test

Input Voltage / Frequency	Output load (A)	Measured PF
115Vac/60Hz	24.96	0.995
115Vac/60Hz	19.96	0.992
115Vac/60Hz	14.97	0.989
230Vac/50Hz	24.96	0.983
230Vac/50Hz	19.96	0.978
230Vac/50Hz	14.97	0.971


Efficiency

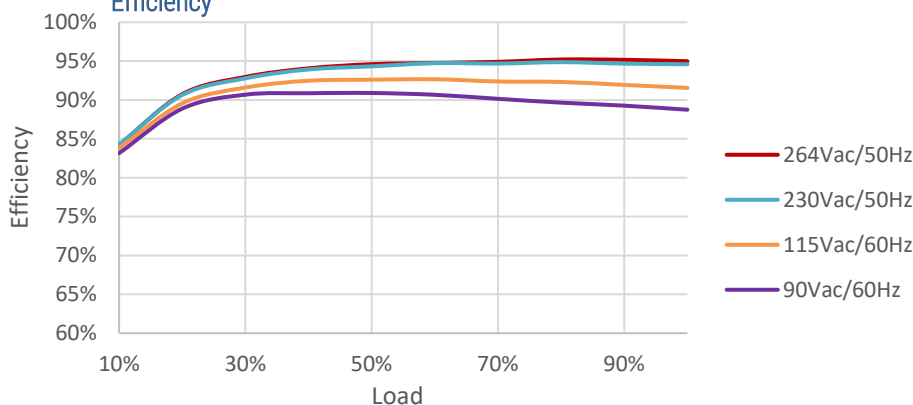




Conducted Emissions Test (CE)

*15 Min warm-up of the power supply was done prior each measurement. Plots below represent test results according to FCC 15 Class B for 120 VAC and EN55032 Class B for 230 VAC. The bottom red limit line shows the -6dB margin to the maximum allowed emissions level according to both FCC 15 and EN55032 standards. Other load conditions available upon request.

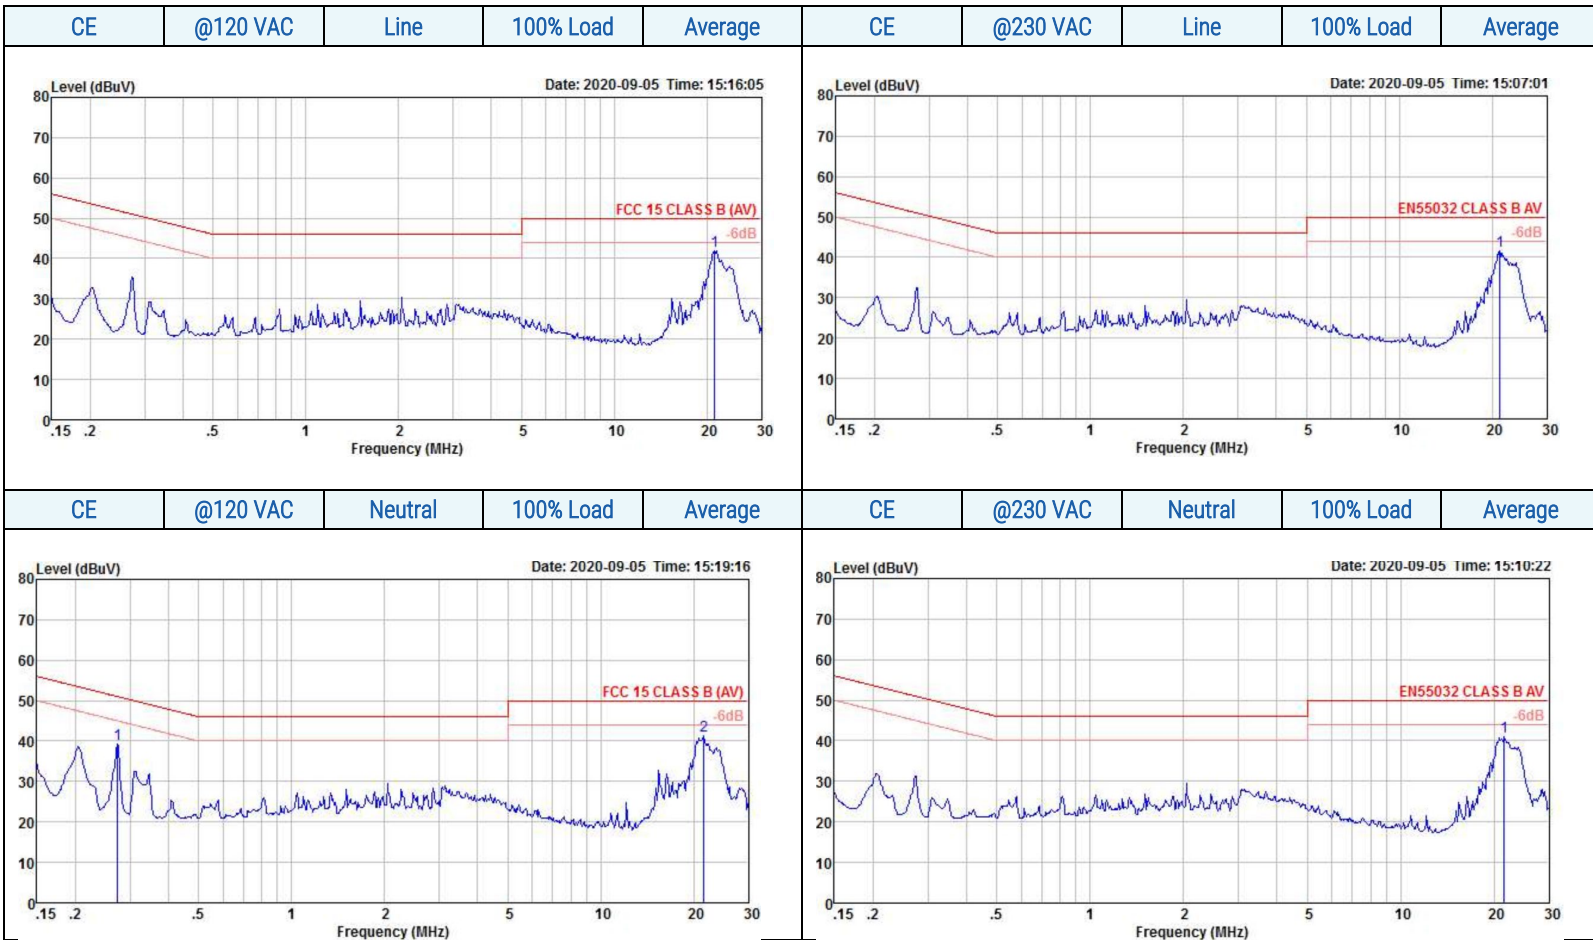



Conducted Emissions Test (CE) CISPR15

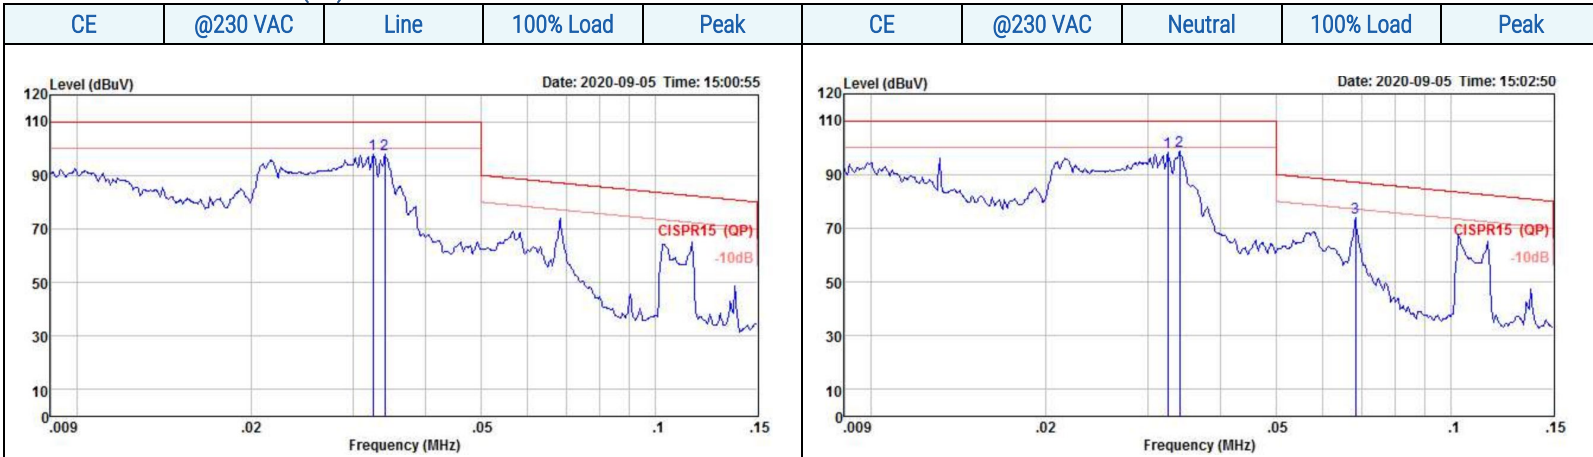



Radiated Emissions Test (RE)

*Plots below represent horizontal and vertical test results at 3 meter distance according to FCC part15B Class B for 120 VAC and EN55032 Class B for 230 VAC. The red limit line shows maximum allowed emissions level according to both FCC part15B and EN55032 standards. Other load conditions available upon request.

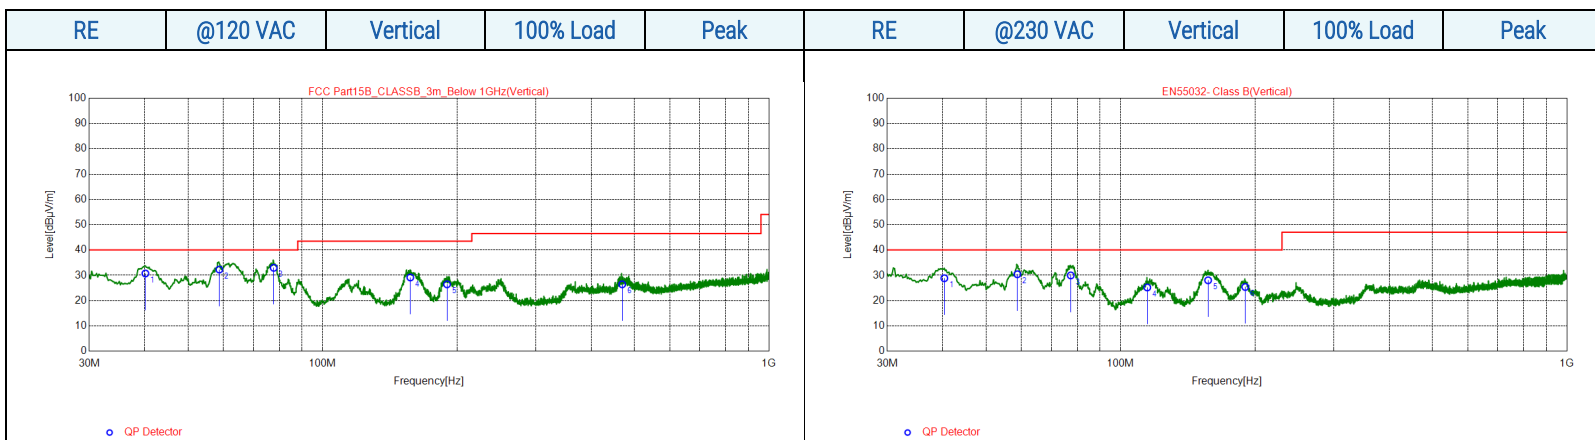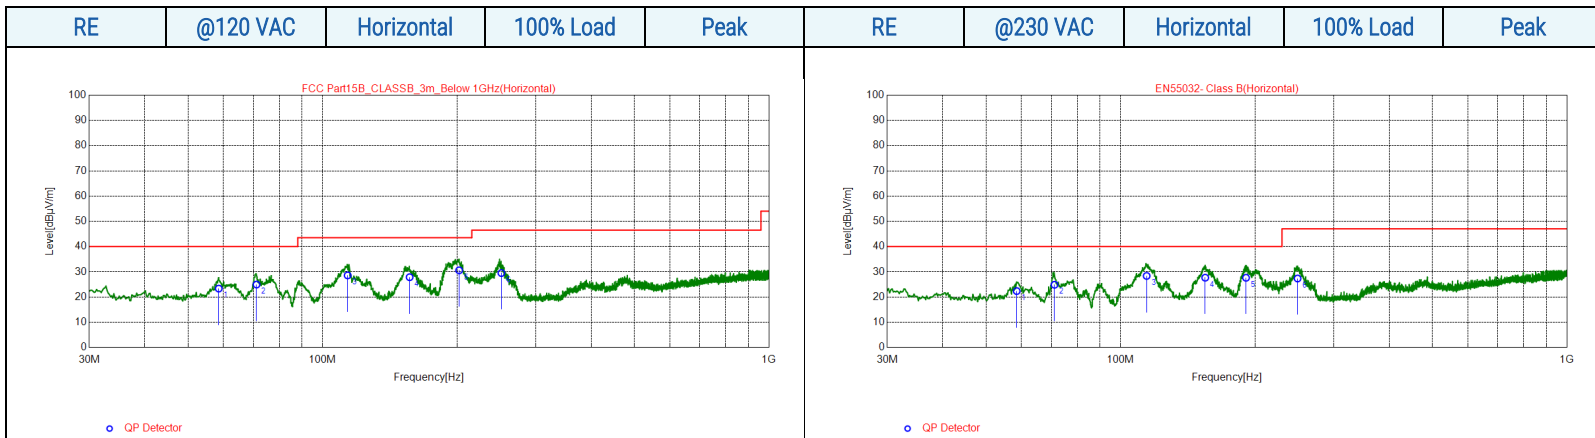

Note:


Conducted and radiated emissions plots show measurements with resistive loads according to the IEC/EN/UL standard's requirements. EMC Performance can be impacted by system level design, integration, or associated connections with additional wires and/or devices. Contact SL Power team for support with system level EMC compliance needs.



THERMAL DATA

The following table lists components of NGB425 series and their maximal allowed temperature (worst case), as confirmed to safety report. Monitoring and keeping these parts below the listed values help to keep the power supply within the given limits by safety agencies:

Nr.	Description	Hazardous Voltage	Reference Designator	Maximum allowed temperature
1	Electrolytic capacitors (Boost)	Yes	C100, C117, C126	105°C
2	Power transformer (Main)	Yes	T1	130°C
3	Electrolytic capacitor (output)		C201	105°C
4	X- Capacitor	Yes	C1	100°C
5	LLC Capacitor	Yes	C213	110°C
6	EMI-Capacitor	Yes	C116	105°C
7	Optocoupler	Yes	U206	115°C
8	MOV	Yes	R100	105°C
9	PFC choke	Yes	L102, L104	130°C
10	LLC Inductor	Yes	L200	130°C
11	Power transformer (AUX)	Yes	T300	130°C

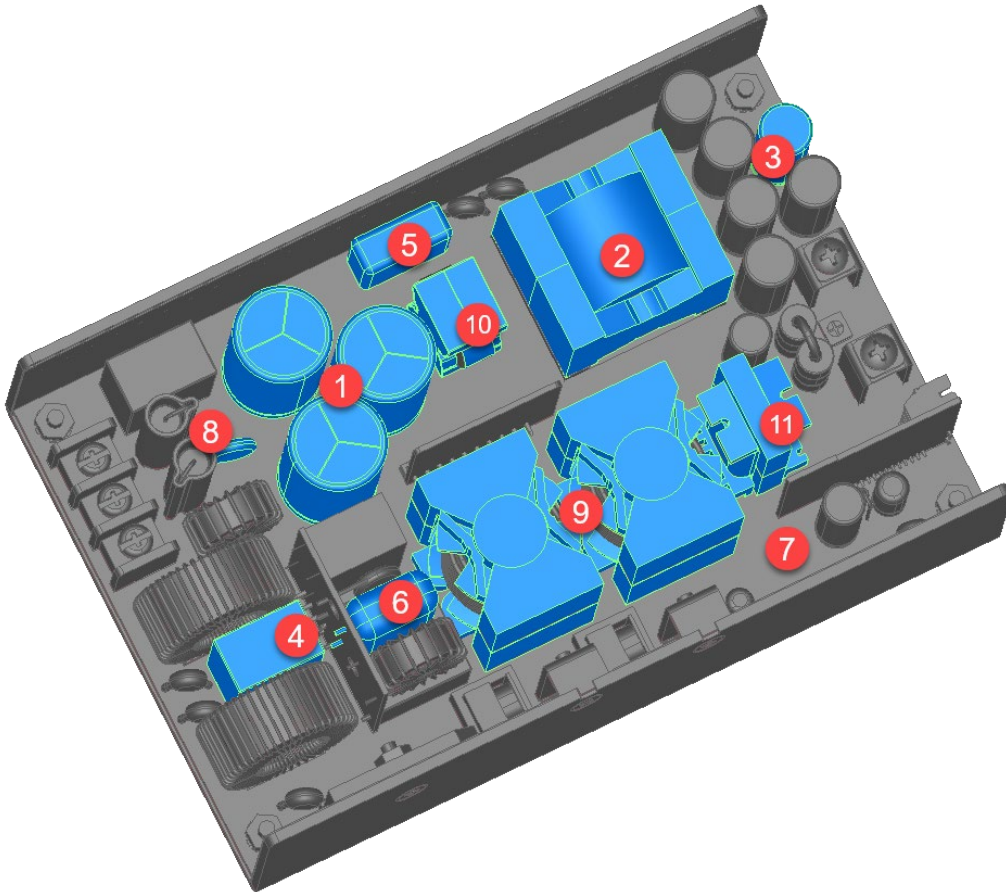



PROPER USE

Thermal Recommendations:

- Life of electrolytic capacitors is significantly affected by temperature. It is strongly recommended to keep their temperature 5 – 10 ° C below the max allowed values in the table under worst case condition especially without active air flow. The reliability of the power supply is affected by higher temperatures as increasing the thermal stress on the components will lead to shorter product life.
- Even if power transformer and inductors offer enough thermal margin from maximal allowed temperature, their temperature can reach 130°C and must be considered carefully while placing other system components close to it.
- For proper worst-case verification, use low line input voltage 85 Vac 50 or 60Hz with highest load at 50° C. Place thermocouples to listed components on a non-conductive area to measure excessive temperatures and to determine correct system thermal design.
- Caution! some components are located on primary side of AC-DC power supply! Use appropriate safety measures as these components are at hazardous voltage levels. Thermal couples need to be electrically isolated. Only qualified personnel should attempt to make these measurements.
- See derating characteristics section for further details.

Installation and Safety:

- The power supplies with high power conversion efficiency rely on convection cooling in the surrounding environment (air) to prevent overheating or excessive component temperatures. Therefore, there needs to be adequate access to ambient air to ensure proper thermal performance of the power supply.
- Do not exceed the power rating of the product with respect to input voltage and environment temperature of the unit.
- The base plate of Class I models is a heat spreader and typically connected to protective earth, it is electrically safe but be aware it may be hot during operation.
- The base plate of Class II models is a heat spreader but floating, it is electrically safe but be aware it may be hot during operation.
- In some designs the additional heatsinks might not be connected to the base plate. These heatsinks might be electrically connected to components on the hazardous primary side and be at elevated potential with respect to ground. Avoid direct electrical connection between the heat sinks in such case.
- The output return of the power supply is by default floating with respect to safety/earth ground (not connected to protective earth).
- A non-electrically conductive insulator should be placed between the unit and any conductive surface close to its top or sides to ensure minimal creepage clearance according to the safety standard. If an insulator is not possible, increase these distances to at least 8 mm (0.315") from any components or leads to keep safety clearance.
- Use a proper mating connector for connection on the input and output connectors of the power supply. Refer to the connector information.
- For better EMI performance avoid cable routing close to power supply especially near magnetics (transformers or inductors) or switching components. If that is not possible, consider shielding cables of the power supply. If improved radiated emissions performance is needed, small ferrite cores can be added to the input or output cable. Contact local SLPE application engineer for support.
- If the system requires an additional EMI filter, carefully consider properly choosing system EMI filters. That can make EMI worse if not properly selected.



FEATURES

Power vs. Ambient Temperature

Both Class I and Class II versions of power supplies are capable to provide rated maximum power under airflow. However, at some applications cooling fans are not allowed due to higher IP ratings or where audible noise is a concern. In these systems the design still allow loads up to 70% of maximum rated power in a convection cooled environment up to 50°C. At higher temperatures, refer to the power derating section to avoid activation of the internal Over Temperature Protection (OTP) which shuts down the power supply during excessive temperature excursions. The overtemperature protection is based on an "auto-recovery" principle. See the Proper Use and Thermal Considerations sections of this document.

Class B Conducted and Radiated EMI performance margins

SL Power Electronics understands the difficulties to pass the EMC/EMI tests during the development of any product. The interference with electromagnetic emissions and increasing amount of product with wireless communications makes it difficult more than ever to remain within the targeted EMI margins. Typical power supply is designed to pass EN55032 Class B and FCC part 15 Class B with typical margin of 6db for conducted emissions (CE) and with typical margin of 3db for radiated emissions (RE). The final enclosure of the system might add additional radiation shielding and is dependent on the type of system. See performance data section of this document for CE/RE plots

Safety and BF Isolation Type Rated

This family complies with BF requirements by providing 2 Means of Patient Protection (2 MOPP) from input to output and 1 MOPP between output and ground to avoid electrical shock for Class I units. All models are CE marked to Low Voltage Directive and approved to AAMI ES/CSA C22.2 No./IEC 60601-1, 3.1rd Edition. Please contact the application engineering team for CE/UL certificates or CB reports if not found on the SLPOWER.COM website for this product.

BF type isolation is referenced in safety standard IEC 60601-1 to define patient applied part classification. BF means Body Floating which must provide a higher degree of protection against electric shock than that provided by type B applied parts. Systems with type BF applied parts allow patient's body to be at floating electrical potential and complying with the specified requirements of standard IEC60601-1. Due to lower values of allowable leakage current in medical power supplies, it is important to substantially reduce the capacitances that cause leakage currents. Reducing their value can severely reduce the EMI filter's effectiveness.

Operation at higher altitude above sea level

For applications at higher sea level the designer should take in account the effect of air pressure on the power supply. SLPE typically designs power supplies that allow to use the units at altitudes up to 5000 meters above sea level. This is with respect to air clearance between the components on the PCB following the multiplication factor as described in IEC 60601-1 8.9.1.5 – ME Equipment rated for high altitudes. However, considering the thermal performance of the power supply at altitudes above 2000 m the cooling efficiency drops due to lower air density. Paschen's law explains this effect in more detail: https://en.wikipedia.org/wiki/Paschen%27s_law Whether natural convection or active airflow, the dissipated heat transfer from power supply is less effective at higher altitudes and must be considered.

Designed to meet IEC 60601-1-2 4th Edition EMC requirements


The 4th edition of standard IEC60601-1-2 for EMC requirements was released for NA and EU. Most significant change of the standard is harmonization with IEC60601-1-11 to classify medical devices into three main groups, professional healthcare facility environment, home healthcare environment which is more stringent and desires more attention of system designers and special environment.

It is important to note that IEC 60601-1-2 4th edition, is the EMC standard and not to be confused with safety standard IEC 60601-1 3rd edition.

While a system must be approved to IEC 60601-1-2 standard a power supply is just part of it therefore certification is given at the system level. However, as some of the tests are directly related to functionality of the power supply, its design takes into consideration the IEC 60601-1-2, 4th Edition EMC requirements.

Output Ripple and Noise

Typical output noise and ripple limits are defined to 1% of the output voltage. Noise measurements are made with noise probe directly at the end of 15cm twisted pair wires terminated with a 0.1uF ceramic and 10uF electrolytic low ESR capacitors. Use a short tip oscilloscope voltage probe when making the measurement. This is required to eliminate measurement error due to impedance imbalance errors introduced by the scope probe ground lead length. Values will be higher at ambient temperatures below 0°C. Consult the product datasheet prior to assessing the output ripple and noise measurement results.



Common Mode Noise

Common mode noise is electrical signal that appears between either output and earth ground or chassis ground. This comes about due to parasitic capacitance and inductive coupling in the power supply that couples electrical energy from the primary to the secondary or from the secondary to earth ground. Although the coupling is minimized by design and construction, it cannot easily be eliminated. Be aware of any special needs in the application for low common mode noise.

Load and Noise Filtering Capacitors

The power supply is equipped with output filtering capacitors to minimize the switching frequency voltage ripple and noise that is an artifact of the switching power conversion process. However, additional end load capacitance may be needed depending on the application. With electronic circuitry as the load, it is recommended to add ceramic capacitors (~ 0.1 – 1uF) for noise spike reduction and electrolytic capacitor for ripple reduction and transient response voltage dip reductions. The amount of voltage dip during a transient is a function of the load step amplitude and rise/fall time of the load.

Premium Electrolytic-Capacitors / Reliability and Robustness

Lifetime of the power supply is mostly dependent on life limiting components such as electrolytic capacitors. This is particularly the case for convection and conduction cooled applications. AC ripple currents in these capacitors create additional heat, but the main cause of temperature rise is from adjacent heat sources. The higher the long-term temperature of the electrolytic capacitors, the shorter the life of the capacitor. NGB250 series are designed to keep the temperature of critical electrolytic capacitors as low as possible below the maximum allowed limits but also fitted with premium electrolytic capacitors to benefit from best technologies of capacitor manufacturers. This approach allows NGB250 life cycle of over 10 years in standard business use conditions at ambient temperature of 25°C. Thermal consideration section of this application note lists maximum allowed temperatures of critical electrolytic capacitors and components.

Active or passive inrush current limit

Selected series power supplies are designed with an active circuit to limit inrush current to values as low as 15 A @264VAC. This feature allows the system designers better protection against stressing of components and less risk to trip circuit breakers. A typical design of the power supply is equipped with a passive inrush current limiting peak inrush current to approximately 75 A at a reduce product cost. Contact SLPE representative to review inrush current modification of any selected product.



TERMINOLOGY & DEFINITIONS

IEC

The IEC (International Electrotechnical Commission) is an international body that sets safety standards for the electrotechnology space. The Class I and Class II input designations refer to the internal construction and electrical insulation of a power supply. These standards were developed to protect the user from electric shock.

Class I / II / III

IEC Class I input models have basic insulation and must incorporate a protective earth (ground) connection to mitigate the risk of electric shock. Class I input power supplies have a 3-pin input, line (L), neutral (N) and ground (PE or FG)

IEC Class II input models feature additional safety precautions such as double insulation or reinforced insulation, thereby eliminating the need for a protective earth (ground) connection. Class II input power supplies have a 2-pin input, line (L) and neutral (N).

IEC Class III equipment is defined in some standards where protection against electrical shock relies on the voltage being less than 60Vdc of 42.4Vac_pk referred to as Safety Extra Low Voltage (SELV). Generally, these are battery power or power from a SELV power source.

Type B, Type BF, Type CF applied parts

Applied Part – Part of the medical equipment designed to or likely to physically contact the patient.

Type B (Body) applied part - Not suitable for direct cardiac applications.

Type BF (Body Floating) applied part - A higher degree of protection, not suitable for direct cardiac applications.

Type CF (Cardiac Floating) applied part - The highest degree of protection, suitable for direct cardiac applications.

Leakage Current, Patient Leakage Current

Leakage current is the current that flows through the protective ground conductor to ground. In the absence of a grounding connection, it is the current that could flow from any conductive part or the surface of non-conductive parts to ground if a conductive path was available such as a human body.

Earth Leakage Current: Is the current that flows through the ground conductor of the line cord back to the ground.

Enclosure Leakage Current: Is the current that flows from any part of the enclosure through a person and back to ground is touched by a person.

Patient Leakage Current: applies to medical devices and is the current that flows through a person to ground having an applied part by applying an unintended voltage from an external source.

Single Fault Condition, Normal Condition

Safety standards dictate the requirements for products to remain safe during the normal operating condition (NC) of the product as well as during an abnormal single fault condition (SFC). Examples for SFC are insulation short circuit, open circuit of protective earth or interruption of any one supply conductor.

Isolation and HI-POT

All of the world's safety agencies require a Dielectric Withstanding Voltage test (also known as a HI-POT or Electric Strength test). This test is used to determine the adequacy of the equipment's insulation mechanisms to protect against electrical shock. The HI-POT test is a test of the insulation surrounding the primary circuits. It involves the application of a high voltage from the primary circuit to the grounding (earth) circuit and to the low-voltage secondary circuits. The potential used for each test is pre-determined by the applicable safety standard. It is based on the ac input voltage, the grade of insulation used in the equipment and the accessibility of the secondary voltages.

Continuous Operation vs. Peak Power

The typical applications can be divided to at least three main categories of power requirements. The first would be a system with electromechanical components like motors or pumps. Such devices require nominal power for standard operation and higher power for the initial movements. The momentum of the motor or pump often requires significantly higher input current which can trigger the over current protection if the power supply was not selected properly. The second category is the battery charger with the maximum power required for empty battery state and low to medium power requirement for others. In such systems the designer considers the average power requirement and calculates the time for the thermal relaxation period in case of empty battery where the power supply is required to provide maximum power at the beginning and then decrease slowly till the battery is completely charged. In both these categories the power supply dimension is depending on average or peak power requirements. The other category covers power supply designs for continuous operations in which the rated power is required for long period of time.

Grounding

A power supply can have three types of accessible grounds. Each of these ground connections has dedicated purpose to maintain within safety requirements or electrical characteristics stated in datasheet. Do not mix usage of these electrical contacts.

Functional Ground (FG) also marked as GROUND on AC input. The enclosure of power supply is directly connected to this electrical potential. Floating FG of the power supply may affect electromagnetic characteristics of the unit.

Protective Earth (PE) marked as GROUND on AC input. Same as FG, the enclosure of power supply is directly connected to this electrical potential. While FG is mainly used to improve the EMI performance of the power supply, PE connection requires in addition safety relevant compliance like maximum permissive PE resistance or minimum current conductivity of several amps defined by safety and in different regions worldwide.

Output Return marked as (-) on DC output. Isolated from AC input, rated as SELV. This electrical potential is floating with respect to protective earth.

Signal return marked as GND on the signal connectors. This electrical potential is a reference voltage for digital signals and control features on the power supply such as 5V standby, DC_OK, AUX, ACI, VCI etc.. Shorting of this node to other ground may feed common mode noise into the control system and distort the functionality of digital control or feedback loop.

Primary and Secondary Circuit of a Power Supply

The input part of the power supply is the so-called front-end block or primary side. It contains a rectification stage and an active power factor correction stage to minimize AC mains current distortion and generate a stable energy storage point for further power conversion. This is the block to look at for wide input AC voltage range along with good power factor correction, low harmonics distortions and high efficiency. The controller on the primary side of AC-DC power supply monitors voltage and current changes depending on network and load condition and control power switching devices as part of the power conversion process. This block is hazardous for potential electrical shock. Specific safety standards such as 60601-1 or 62368-1 usually require the output voltage to be isolated from hazardous electrical circuits. This type of protection is achieved by adhering to creepage and clearance distances between primary front-end circuitry and secondary output circuitry after the isolation circuitry of the power supply. By controlling the switching frequency or pulse width of power devices across the transformer, while using several techniques, the isolated DC-DC conversion allows power transmission to the load.



IEC/EN/CSA/ANSI/AAMI ES60601-1, 3rd Edition, Amendment 1

To govern the design of medical equipment, the International Electrotechnical Committee (IEC) has produced a standard to control all aspects of safety directly or indirectly relating to the handling, use or connection to, of medical equipment. This standard is referenced as IEC 60601, or simply referred to as IEC 601.

IEC61010-1

Safety Requirements for Electrical Equipment for Measurement, Control, and Laboratory Use

UL8750

Safety Standard for LED Lighting. The standard covers LED equipment that is part of a luminaire or other lighting equipment operating in the visible light spectrum

Class 2, UL1310

These requirements cover indoor and outdoor use for Class 2 power supplies, LED drivers, and battery chargers. The UL1310, Class 2 standard sets limits on the source with limited voltage and energy capacity

Certified Body Scheme (CB Report)

The CB Scheme is a vast international arrangement established by the International Electrotechnical Commission (IEC) for mutual acceptance of safety test reports among participating certification organizations in the field of electrical and electronic equipment.

UL94 Enclosure Flame Rating

HB: Slow-burning on a horizontal specimen; burning rate < 76 mm/min for thickness < 3 mm or burning stops before 100mm

V-2: Burning stops within 30 seconds on a vertical specimen; drips of flaming particles are allowed.

V-1: Burning stops within 30 seconds on a vertical specimen; drips of particles allowed as long as they are not inflamed.

V-0: Burning stops within 10 seconds on a vertical specimen; drips of particles allowed as long as they are not inflamed.

Insulation and Isolation

Operational/Functional: Insulation for correct operation of equipment.

Basic Insulation: Insulation to provide basic protection against electric shock.

Supplementary Insulation: Independent insulation applied in addition to basic insulation to ensure protection against electric shock in the case of a failure of basic insulation.

Double Insulation: Insulation that includes both basic and supplementary insulation.

Reinforced Insulation: Provides a single insulation system that offers a degree of protection against electric shock equivalent to double insulation.

IEC61000-4-x Acceptance Criteria

The test results for the various sections of the EN61000-4 Standards are classified in terms of the loss of functionality or degradation of performance of the equipment under test (EUT), relative to a performance level defined by its manufacturer, the requestor of the test, or agreed upon between the manufacturer and the purchaser of the product. The recommended classifications apply to all sections of the standard detailed herein, and are as follows:

Criteria A: Normal performance within limits specified by the manufacturer, requestor, or purchaser.

Criteria B: Temporary loss of functionality or degradation of performance which ceases after the disturbance is removed, and from which the EUT recovers its normal performance without operator intervention.

Criteria C: Temporary loss of functionality or degradation of performance, the correction of which requires operator intervention.

Criteria D: Loss of functionality or degradation of performance which is not recoverable, owing to damage to hardware or software, or loss of data.